



Type:-A

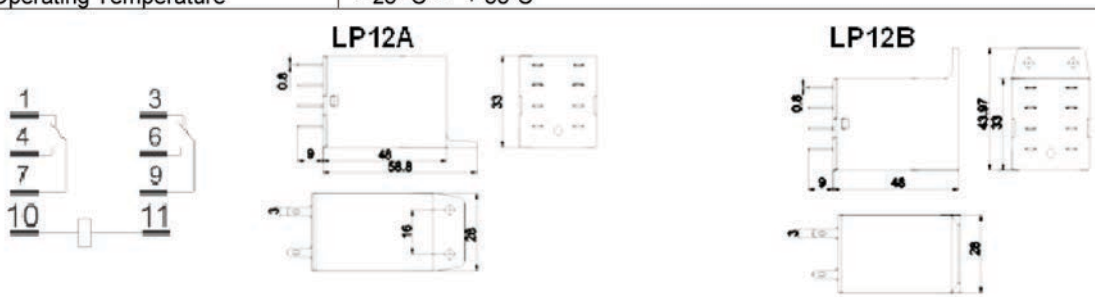


Type:-B

Relay Type:- LP12 DC12V

Terminal Type:- Nil Solder P Plug In

Coil Voltage:- DC/AC

Model		LP 12			
Features	Dimension L * W * H (mm)	58.8 * 33 * 28			
	Terminal Type	Solder/Plug in			
	Weight	80 gm Approximately			
Contact Data	Contact Form	2C			
	Contact Material	Ag Alloy			
	Contact Capacity	7A @ 250VAC /28VDC			
	Contact Resistance	100mΩ			
Coil Data	Coil Voltage (DC)	6 ~ 220 VDC			
	Coil Voltage (AC)	6 ~ 380 VAC			
	Coil Power Consumption	DC: 2.0W AC 3.5VA			
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ±10%	Pull in Voltage (Max)	Drop Out Voltage (Min)
		12 VDC	160	75 %	10 %
24 VDC		500	75%	10 %	
240 VAC		10000	80 %	30 %	
General Data	Dielectric Strength	1200 VAC @ 50 Hz / Min (Between Open Contacts)			
		1500 VAC @ 50 Hz / Min (Between Coil & Contacts)			
	Insulation Resistance	500 MΩ			
	Electrical Life	1 x 10 ⁵			
	Mechanical Life	1 x 10 ⁷			
	Operating Temperature	- 25 °C ~ + 55°C			
Dimensions					
Application	Vending Machine , Control Equipments, Cooking Appliances etc.				