


LT2S - 12VDC - T

Relay Type: _____
Coil Voltage: 5 ~ 24VDC _____
Coil Sensitivity: - T: 0.2W _____

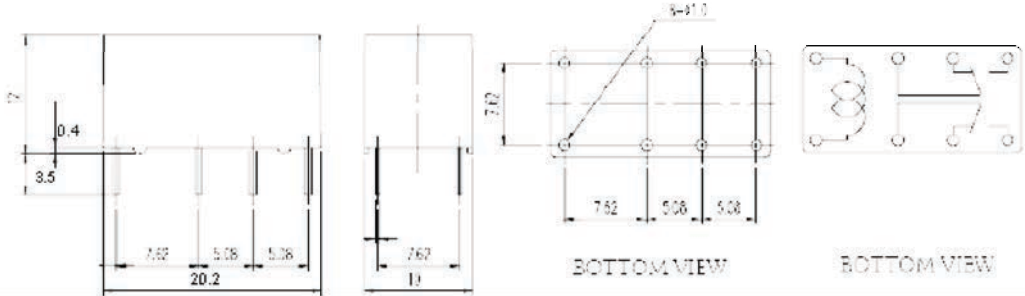

Model		LT2S			
Features	Dimension L * W * H (mm)	20.2 * 10 * 12			
	Terminal Type	PCB			
	Weight	5 gm Approximately			
Contact Data	Contact Form	2C			
	Contact Material	Silver Alloy			
	Contact Capacity	1A @120VAC 1A @24VDC			
	Contact Resistance	100mΩ at 1A 6VDC			
Coil Data	Coil Voltage	5 VDC ~ 24 VDC			
	Coil Power Consumption	0.20W			
	Coil Specification	Coil Voltage	Coil Resistance (Ω) ±10%	Pull in Voltage (VDC)	Drop Out Voltage (VDC)
		5 VDC	120	75 %	10 %
		12 VDC	720	75 %	10 %
24 VDC	2880	75 %	10 %		
General Data	Operate Time	6 msec (Max.)			
	Release Time	4 msec (Max.)			
	Dielectric Strength	500 VAC @ 50 Hz / Min (Between open Contacts)			
		1000 VAC @ 50 Hz / Min (Between Coil & Contacts)			
	Insulation Resistance	100 MΩ 500VDC			
	Electrical Life	1 x 10 ⁵			
	Mechanical Life	1 x 10 ⁷			
Operating Temperature	- 30°C ~ + 70°C				
Dimension	 <p>Technical drawings of the relay showing side and bottom views with dimensions. The side view shows a height of 12mm and a width of 20.2mm. The bottom view shows a footprint of 20.2mm by 10mm. Dimensions for terminal spacing are provided: 3.5mm, 0.4mm, 7.62mm, 5.08mm, 5.08mm, 7.62mm, 5.08mm, 5.08mm, and 7.62mm. A note indicates a tolerance of ±0.1mm.</p>				
Application	Telecommunication, Electronics equipment etc.				